




ACCREDITED
HOME ELEVATOR COMPANY

Hydraulic Elevator System

Specification type	Hydraulic
Load Capacity	950 lbs.
Rated Speed	40 Fpm
Power supply <i>(Circuit supplied by others)</i>	230V single phase 30amp
Lighting Supply <i>(Circuit supplied by others)</i>	120V 15 amp
Drive system	1:2 roped hydraulic with submersed power unit
Maximum Travel	50 Feet
Control System	Microprocessor based controller with led diagnostics
Levels and openings	Up to 6 stops / up to 2 openings
Pit depth	Minimum 9.00"
Overhead	96" for standard 7'0" cab.
Cab size	Dependent upon host-way size. Not to exceed 15 Square feet.
Standard features	<ul style="list-style-type: none">• Recessed gate pocket.• Quiet 2 speed valve for soft start and stop.• Submersed pump and motor• Automatic cab lighting.• Car here lights at all hall stations.• Auto homing feature.• Unfinished plywood flooring.• Hardwood veneer cab.• Accordion Gates.
Safety features	<ul style="list-style-type: none">• Type A instantaneous safeties.• Manually reset slack rope switch.• Pipe rupture valve.• Low pressure switch.• Positively open gate safety switch.• Upper and lower limits.• Emergency stop and alarm.• Pit and car top stop switches.

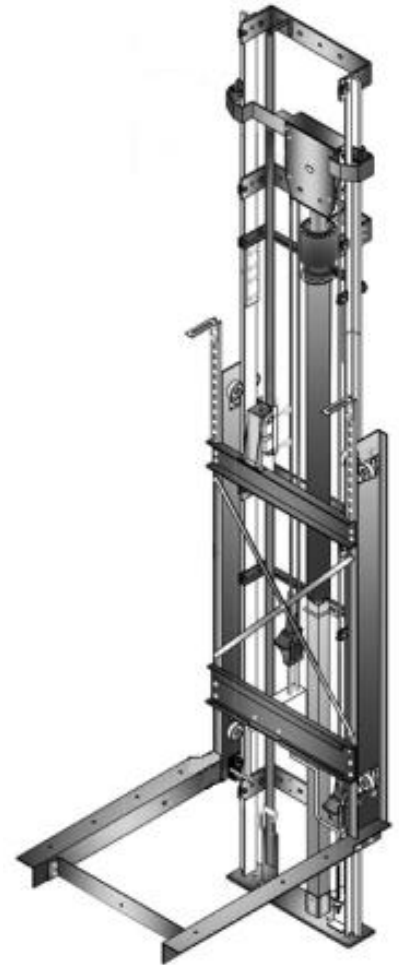

Accredited Home Elevator Company

www.accelelevator.com (800) 488 5905

AHE | 127 S Main Street Barnegat, NJ 08005 | marketing@accelelevator.com